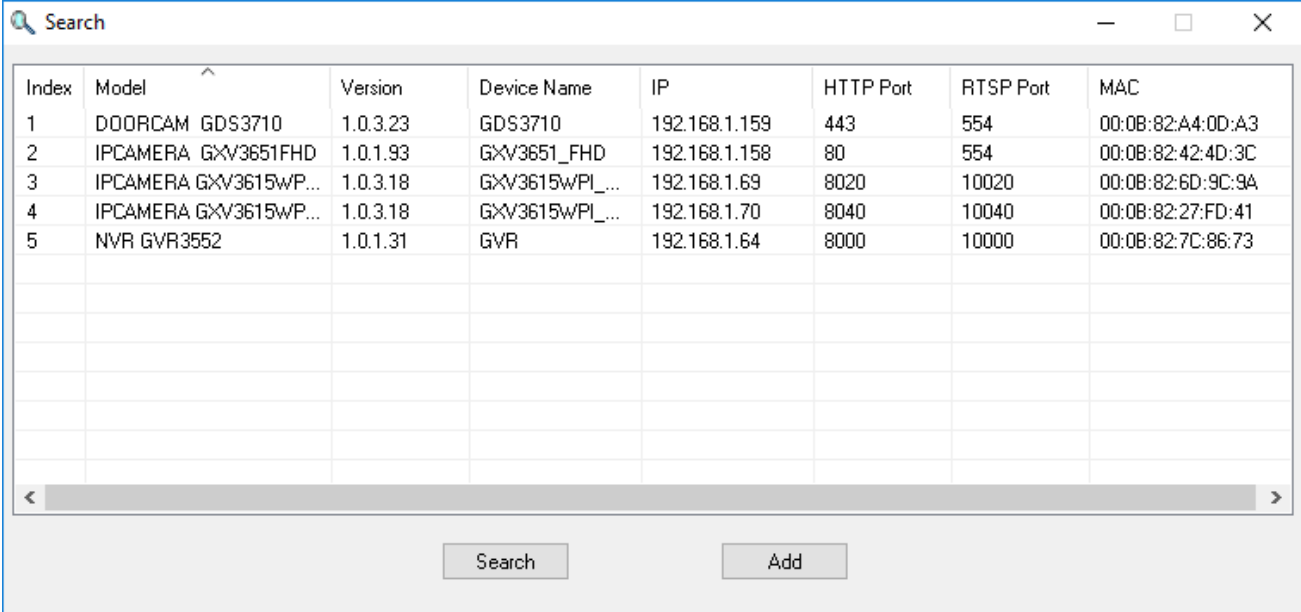# GRANDSTREAM NETWORKS

GS_Search.exe Utility Tool
Version 1.0.3.12
Date: January 3nd, 2018

This utility will help to find the IP address of Grandstream Video Surveillance products and the Door System series products GDS37XX in the same LAN.

1. Run the Grandstream Search Tool.

2. Click [Search] button begin device detection.

3. The detected devices will be displayed as output as shown like below:

Index	Model	Version	Device Name	IP	HTTP Port	RTSP Port	MAC
1	DOORCAM GDS3710	1.0.3.23	GDS3710	192.168.1.159	443	554	00:0B:82:A4:0D:A3
2	IPCAMERA GXV3651FHD	1.0.1.93	GXV3651_FHD	192.168.1.158	80	554	00:0B:82:42:4D:3C
3	IPCAMERA GXV3615WP...	1.0.3.18	GXV3615WPI_...	192.168.1.69	8020	10020	00:0B:82:6D:9C:9A
4	IPCAMERA GXV3615WP...	1.0.3.18	GXV3615WPI_...	192.168.1.70	8040	10040	00:0B:82:27:FD:41
5	NVR GVR3552	1.0.1.31	GVR	192.168.1.64	8000	10000	00:0B:82:7C:86:73

[Search]   [Add]

4. Double click the selected product (like DOORCAM GDS3710) will trigger the default browser to running with the displayed IP as URL. User can then configure the device through the webGUI after entering the correct credentials.

NOTE:

- *If GSurf_Pro installed, the embedded "Search Tool" of GSurf_Pro SHOULD be used instead of this one.*

- *If GDSManager installed, the embedded "Search Tool" of GDSManager SHOULD be used instead of this one.*

- *IP can ONLY be found and not be changed. For security reason, IP address can ONLY be changed by administrator at webGUI.*

CHANGE LOG since version 1.0.3.10 and 1.0.3.11:

- Added new products support and version number

- Removed IP address revision feature from utility for security reason. Any IP address change should be performed by using the WebGUI of the device.